

受控

FUNCTION	COLOR
MOTOR U	BLUE (14AWG)
MOTOR V	BROWN (14AWG)
MOTOR W	PURPLE (14AWG)

技术要求:


定子引出线按GB/T 7345-2008要求:

对定子三相线, 每根引出线应能承受9.0N的拉力;


引出线不能断开，绝缘层和线芯不能损坏。

L=170~190 剥线5搪锡

Power Wire

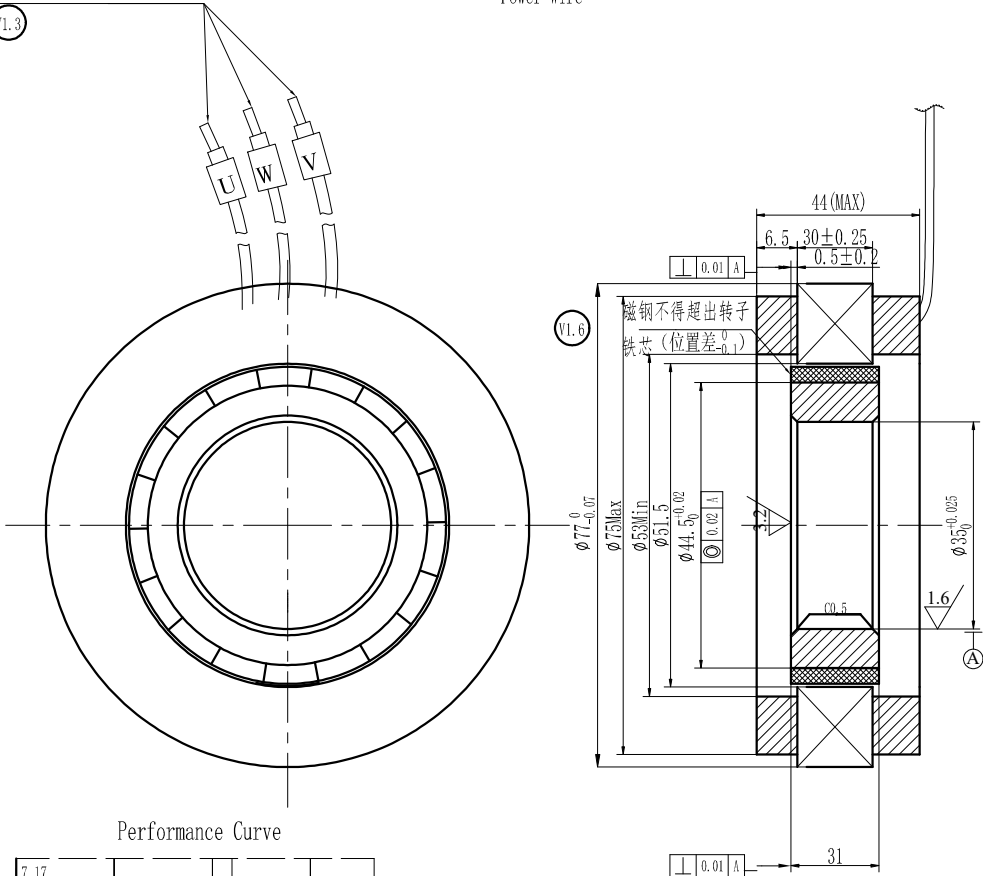

Performance Curve

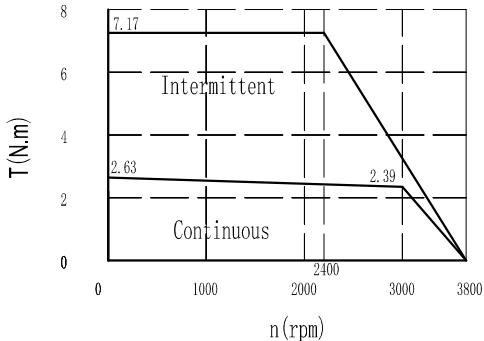

VER	DESCRIPTION OF CHANGE	V1.6	KA2303388	2T	SL	23-08-29	DESIGN	DATE	P/N.	307080284SS			
V1.4	更改电参数	REV	ECN NO.	DRN	APP'D	DATE	ZZJ	22-04-25	TITLE	Outside Drawing			
V1.5	新增开路电感数据	UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: ANGULAR: .x ±0.5 ±0°30' .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING		MATERIAL		CONTR.	CHECK	22-04-25	USED ON	FMC07730-0075-3035N-8D50			
V1.6	位置差由±0.05改为 ⁰ _{-0.1}						LSJ		APPD			22-04-25	DWG NO.
							SL						
								FIRST ANGLE PROJECTION				SCALE	
							SHEET OF						