

受控

FUNCTION	COLOR
MOTOR U	BLUE (20AWG)
MOTOR V	BROWN (20AWG)
MOTOR W	PURPLE (20AWG)

Power Wire

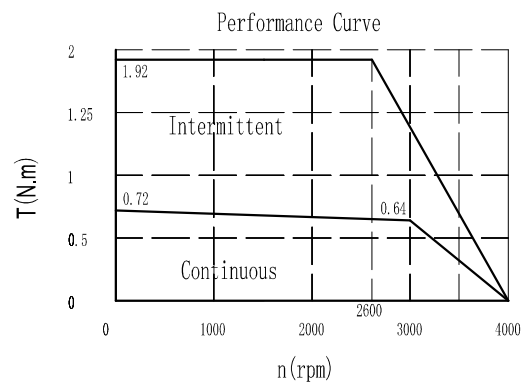
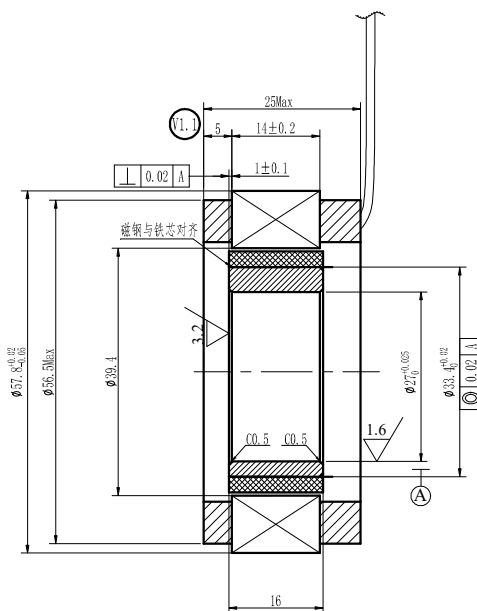
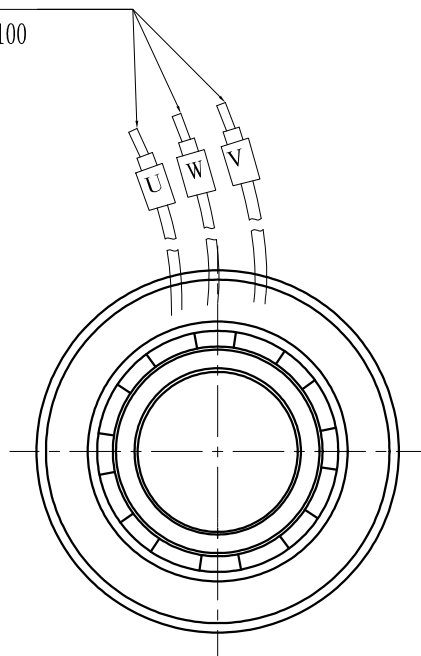
技术要求:

定子引出线按GB/T 7345-2008要求:

对定子三相线, 每根引出线应能承受9.0N的拉力:

引出线不能断开，绝缘层和线芯不能损坏。

动力线 (剥线5 搪锡)

 $L \geq 100$ 

DC BRUSHLESS SERVO MOTOR
FMC05714-0020-3027N-8DS00

W	200	V	48
A	5.1	Nm	0.64
RPM	3000	Ins	F

Kinavo Servo Motor (Changzhou) Ltd.

MADE IN CHINA

S/N: 307080XXXKYYDDDNNNN



VI.2	KA230353	2T	SL	23.8.7	DESIGN	DATE	P/N.	307080333SS	
REV	ECN NO.	DRN	APP'D	DATE	ZZJ	22-03-02	TITLE	外形图	
UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS: ANGULAR: .x ±0.5 ±0° 30' .xx ±0.25 .xxx ±0.1 UNIT: mm DO NOT SCALE DRAWING		MATERIAL	CONTR.	CHECK	22-03-02		USED ON	FMC05714-0020-3027N-8DS0C	
				LSJ				DWG NO.	
					APPD				
					SL		22-03-02		
		FIRST ANGLE PROJECTION			SCALE			KINAVO MOTOR	
			SHEET OF						