



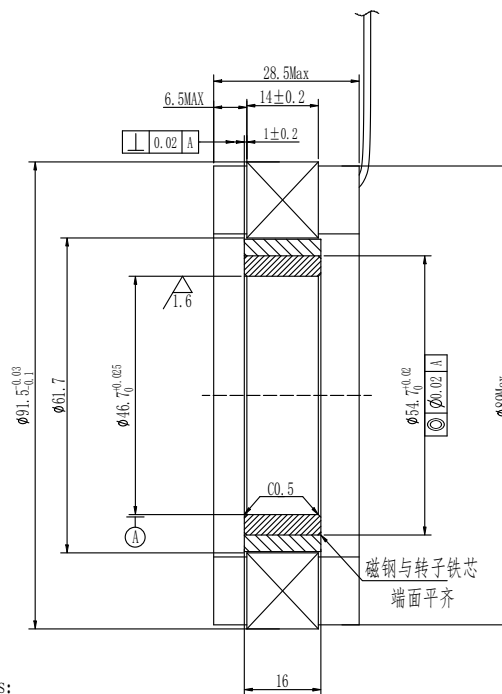

技术要求Technical requirements:

- 1、带★要求，为产品重要和关键特性
Requirements marked with ★ indicate important and critical features of the product
- 2、引出线不能断开，绝缘层和线芯不能损伤
The outgoing line cannot be disconnected, and the insulation layer and wire core cannot be damaged
- 3、定子引出线参照GB/T 7345-2008要求
The stator outgoing line shall comply with the requirements of GB/T 7345-2008
- 4、对于定子三相线，每根引出线应能承受9.0N的拉力
For stator three-phase wires, each lead out wire should be able to withstand a tensile force of 9.0N

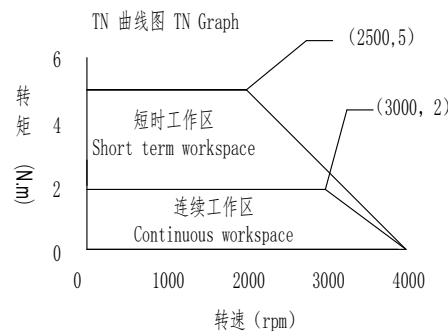

线束定义表Wire Singal Definition			
信号定义 Defintion	引线颜色 Colour	线径Wire Diameter	备注 Remarks
U相 MOTOR U	蓝 BL	14AWG	
V相 MOTOR V	棕 BR		
W相 MOTOR W	紫 PU		

未注线性公差 Undeclared linear tolerance										批准Approve	HH	2024/7/22	料号Part No	307091159SS	产品外形图Product Outline Drawing Kinco 步科 步科股份：688160 The copyright of this drawing belongs to our company and unauthorized dissemination is prohibited 页码Page No Sheet 1 OF 1 A3
0.5~3	±0.2					标准化Standard	ZY	2024/7/22	型号Model	FMC09114-0063-3046X-8DS01					
>3~6	±0.3					工艺Technique	LZH	2024/7/22	版本Version	V1.0					
>6~30	±0.5					审核Check	ZZJ	2024/7/22	比例Scale	1:1					
>30~120	±0.8	V1.0	/	原始版本	新发布	2024/7/22	设计Design	ZT	2024/7/22	投影法					
>120~400	±1.2	VER Mark	版本记录Version record	归档方式ECN	NO	归档日期Date	评审Review	姓名Names	日期Data	Projection methods					

Kinco 步科
步科股份: 688160