
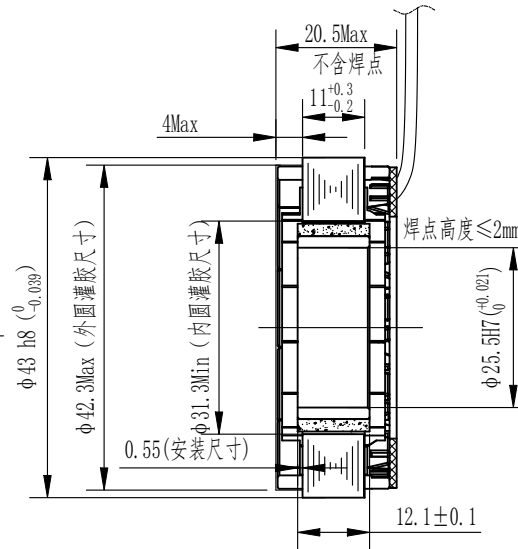


受控


TN 曲线图
Performance Curve

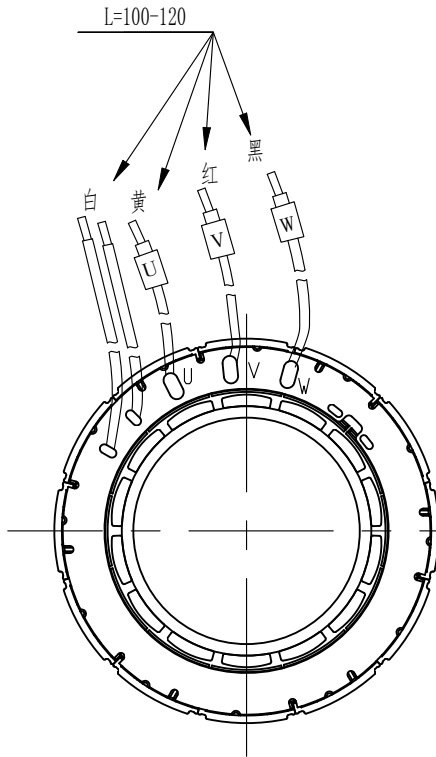

转向: 从出线端看CW顺时针

线束定义表Wire Singal Defintion			
信号定义 Defintion	引线颜色 Colour	线径Wire Diameter	备注 Remarks
U相 MOTOR U	黄 YELLOW	22 AWG	
V相 MOTOR V	红 RED		
W相 MOTOR W	黑 BLACK		
NTC	白 WHITE	28AWG	
NTC	白 WHITE		

技术要求Technical requirements:
1、带★要求, 为产品重要和关键特性
Requirements marked with ★ indicate important and critical features of the product
2、引出线不能断开, 绝缘层和线芯不能损伤
The outgoing line cannot be disconnected, and the insulation layer and wire core cannot be damaged

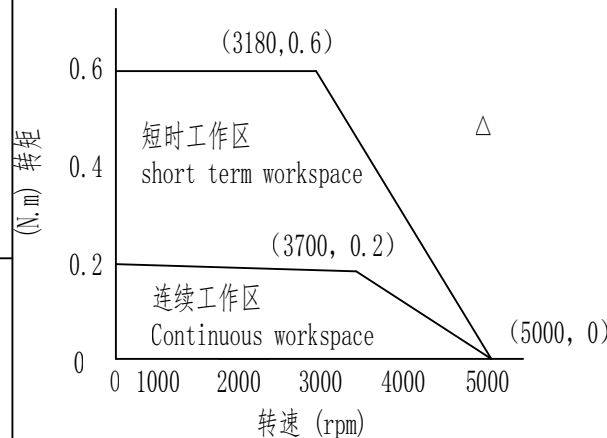

未注线性公差 Undeclared linear tolerance						批准Approve	SL	2025-07-16	料号Part No	307092003	产品外形图Product Outline Drawing	
0.5~3	±0.2					标准化Standard	ZY	2025-07-16	型号Model	FMK04311-0008-3725N-7DP02	Kinco步科 步科股份: 688160 The copyright of this drawing belongs to our company and unauthorized dissemination is prohibited	
>3~6	±0.3	V1.2	△	增加TN曲线	PCD26105	工艺Technique	PHX	2025-07-16	版本Version	V1.2		
>6~30	±0.5	V1.1	△	重量更新	PCD25242	审核Check	ZZJ	2025-07-16	比例Scale	1:1		
>30~120	±0.8	V1.0	/	原始版本	新发布	设计Design	WJH	2025-07-16	投影法 Projection methods		页码Page No	Sheet 1 Of 1
>120~400	±1.2	VER	Mark	版本记录Version record	归档方式ECN No	归档日期Date	评审Review	姓名Names	日期Data			A3