


静态扭矩 Static Friction	15Nm
电压 Voltage	24VDC
功率 Power	29W



角号 Pin	定义 Function	颜色 COLOR
1	BRAKE(+)	红 RED
2	U	黄 YELLOW
3	V	红 RED
4	W	黑 BLACK
5	BRAKE(-)	黑 BLACK
6	PE	黄绿 YELLOW/GREEN







6 PIN
HF02106ZJ

角号 Pin	定义 Function	颜色 COLOR	角号 Pin	定义 Function	颜色 COLOR
1	VCC +5V	红 RED	10	NC	NC
2	GND	黑 BLACK	11	NC	NC
3	NC	NC	12	NC	NC
4	NC	NC	13	SHIELDING	
5	NC	NC	14	NC	NC
6	NC	NC	15	NC	NC
7	NC	NC	16	SD+	蓝 BLUE
8	NC	NC	17	SD-	黄 YELLOW
9	NC	NC			



17 PIN
HF01817ZJ

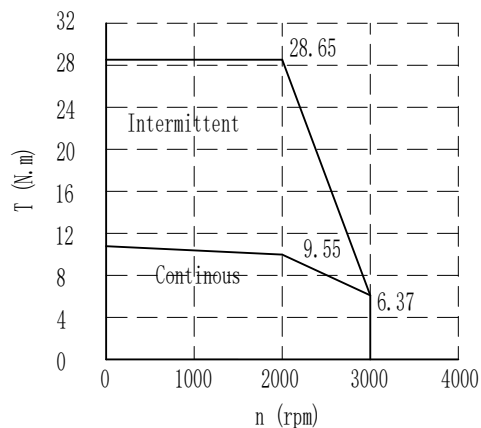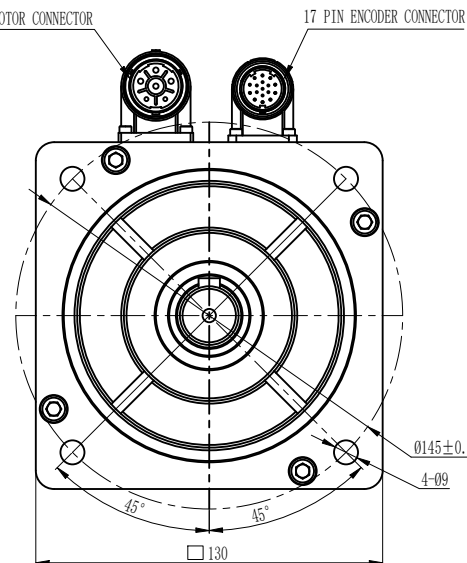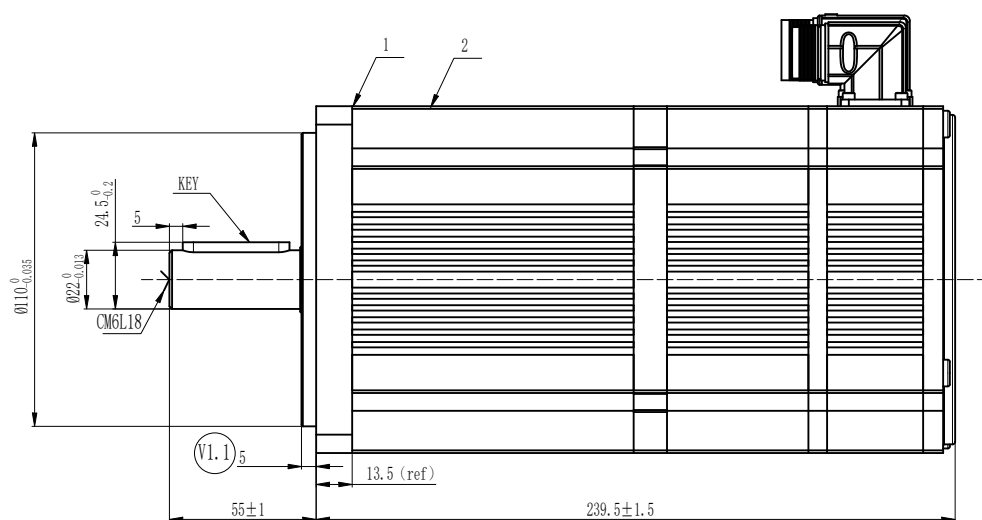

NAMEPLATE

S/N: VX95159YYDDDDNNNN

VER	DESCRIPTION OF CHANGE	V1.1	ECN240090	LTL	WJH	2024-05-28	DESIGN	DATE	P/NO.	9.5159
V1.1	法兰高度5.5变更为5	VER	ECN NO.	CHANGE	APP'D	DATE	LJ	2022-08-16	TITLE	Outside Drawing
		FINAL TOLERANCE REFERENCE GB/T 1804-m Unit:mm LINER			MATERIAL		CHECK	2022-08-16	USED ON	SMC130D-0200-20VKB-5LSP
							LSJ		SCALE: 1:2.5	VER: V1.1
							APPROVE	2022-08-16		
							SL			
		≤6 ±0.1	>6~30 ±0.2	FIRST ANGLE PROJECTION		SHEET 1 OF 1		KINCO		
		>30~120 ±0.3	>120~400 0.5							