


静态扭矩 Static Friction	15Nm
电压 Voltage	24VDC
功率 Power	29W

刹车参数 Brake Data





角号 Pin	定义 Function	颜色 COLOR	
1	BRAKE(+)	红 RED	
2	U	黄 YELLOW	
3	V	红 RED	
4	W	黑 BLACK	
5	BRAKE(-)	黑 BLACK	
6	PE	黄绿 YELLOW/GREEN	


动力 Power

角号 Pin	定义 Function	颜色 COLOR	角号 Pin	定义 Function	颜色 COLOR	
1	VCC +5V	红 RED	10	NC	NC	
2	GND	黑 BLACK	11	NC	NC	
3	VB+	棕 BROWN	12	NC	NC	
4	VB-	白 WHITE	13	SHTELDING		
5	NC	NC	14	NC	NC	
6	NC	NC	15	NC	NC	
7	NC	NC	16	SD+	蓝 BLUE	
8	NC	NC	17	SD-	黄 YELLOW	
9	NC	NC				

反馈 Feedback

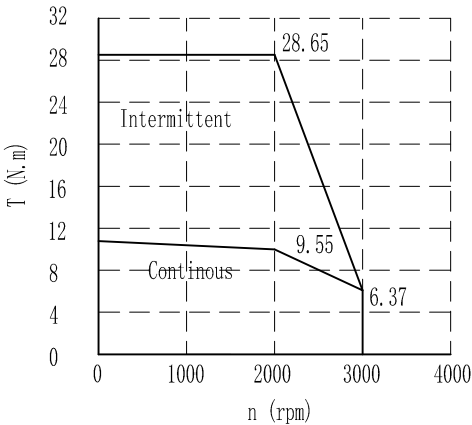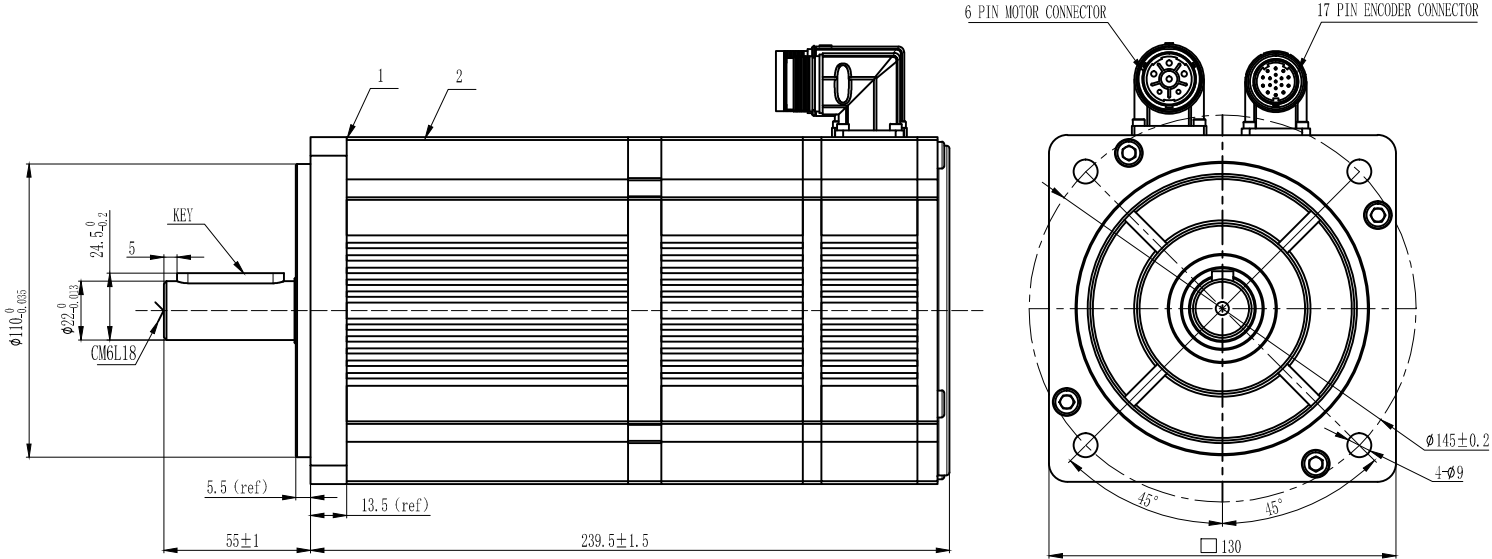

LABELS

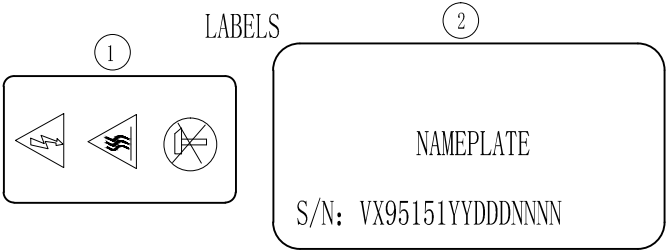

技术参数 Technical Data	
极数 No. of poles	10
母线电压 DC Link Voltage U_{dc} (V)	560
额定功率 Rated Power P_s (W)	2000
额定转矩 Rated Torque T_s (N.m)	9.55
额定转速 Rated Speed n_n (rpm)	2000
额定电流 Rated Current I_s (A)	4.75(ref.)
最大转矩 Maximum torque T_m (N.m)	28.65
最大电流 Maximum Current I_m (A)	15(ref.)
连续静态转矩 Standstill torque T_s (N.m)	10.51
连续静态电流 Standstill Current I_s (A)	5.25(ref.)
线电阻 Resistance line-line R_s (Ω)	1.92(ref.)
线电感 Inductance line-line L_s (mH)	18.6(ref.)
电气时间常数 Electrical time constant τ_e (ms)	9.69
机械时间常数 Mechanical time constant τ_m (ms)	1.61
反电势常数 Voltage constant K_e (V/krpm)	126.5(ref.)
转矩常数 Torque constant K_t (Nm/A)	2.1
转动惯量 Rotor moment of inertia J_m (Kg.cm ²)	21.25
最大径向力 Max. radial force F_r (N)	980
最大轴向力 Max. axial force F_a (N)	392
反馈装置 Feed back device	16/23bit Multi-turn Absolute encoder (NRZ)
绝缘等级 Insulation class	F
防护等级 Protection level	IP65, shaft sealing IP54
重量 Weight (Kg)	12

VER	DESCRIPTION OF CHANGE	VER	ECN NO.	CHANGE	APP'D	DATE	DESIGN	DATE	P/NO.	9.5151
							LJ	2022-08-20	TITLE	Outside Drawing
							CHECK		USED ON	SMC1300-0200-20VBR-5HSP
							LSJ	2022-08-20	SCALE: 1:2.5	VER: V1.0
							APPROVE			
							SL	2022-08-20		
							FIRST ANGLE PROJECTION			
								SHEET 1 OF 1		

FINAL TOLERANCE REFERENCE			
GB/T 1804-m Unit:mm			
LINER			
≤6	±0.1	>6~30	±0.2
>30~120	±0.3	>120~400	0.5

KINCO