

2	1
4	3


动力线 Power Wire

角号 PIN	定义 FUNCTION	颜色 COLOR
1	VCC+5V	红色 RED
2	GND	黑色 BLACK
3	VB	棕色 BROWN
4	电池GND	白色 WHITE
5	485+	蓝色 BLUE
6	485-	黄 YELLOW






The diagram shows a rectangular component with two rows of pins. The top row has pins labeled 6, 4, and 2 from left to right. The bottom row has pins labeled 5, 3, and 1 from left to right. Pin 1 is highlighted with a larger square border.

SC-06



SC-06

反馈线 Feedback Wire

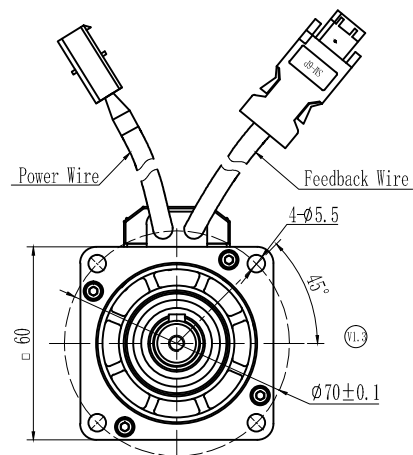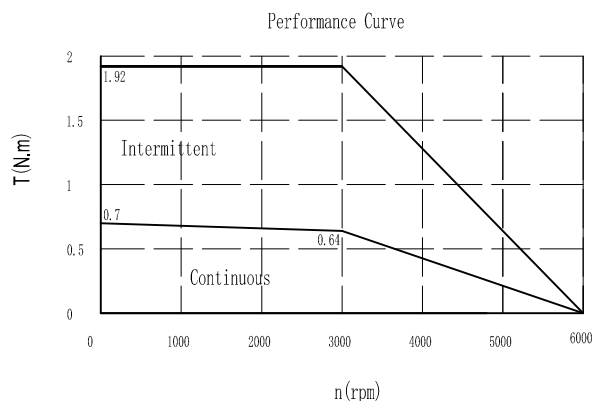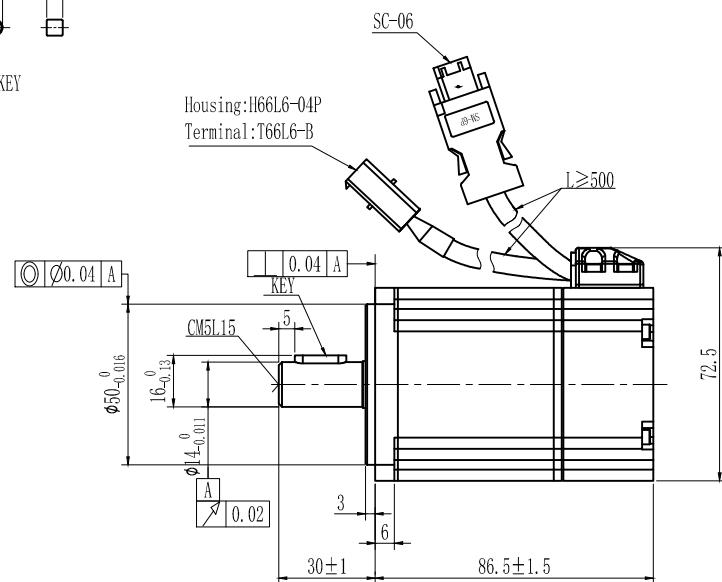

V1.4

S/N:V4NUK1MYYDDDNNNN

VER	DESCRIPTION OF CHANGE	(V1.3)	KA220297	WYD	ZZJ	22-8-4	DESIGN	DATE	P/NO.	9.5138SS	
(V1.1)	更新SN	VER	ECN NO.	CHANGE	APP'D	DATE	WYD	21-1-14	TITLE		Outside Drawing
(V1.2)	更新SN	FINAL TOLERANCE REFERENCE GB/T 1804-m Unit:mm LINER			MATERIAL		CHECK	21-1-14	USED ON		SMC60S-0020-30YAK-5LSU
(V1.3)	更新参数						LS		21-1-14	SCALE:	
(V1.4)	更新SN						APPROVE	21-1-14			
							SL				
		≤6	±0.1	>6~30	±0.2	FIRST ANGLE PROJECTION 		SHEET 1 OF 1		KINCO	
		>30~120	±0.3	>120~400	±0.5						