




Technical Data - Electrical Ratings

Voltage Supply	24 VDC
Signal Type	Continuous
Light Colors	Red, Yellow, Green *
Power Consumption	0,7W
Connection	Cable, M12 Connector
Buzzer Output	No Buzzer
Buzzer Tone Type	No Buzzer
Dimensions	50 x 50 x 49 mm
Weight Approx	65g
Protection	IP65 **
Body Material	ABS
Mounting	Panel Mount With M32 Lock Nut
Luminous Source	LED
Lens Material	Polycarbonate
Temperature Range	-20°C to +50° C


* Inquire for other modes

** Inquire for higher grades

Technical Drawings

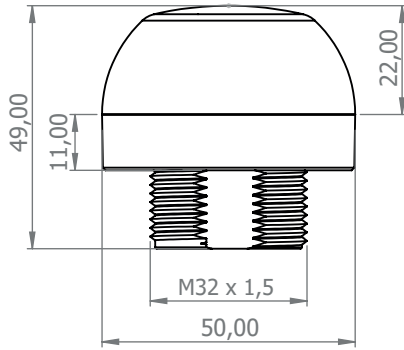

24 With Cable



- Blue (GND)
- Black (PNP NO Output)
- Gray (+24V Green LED)
- White (+24V Red LED)
- Brown (+24V Supply)

Code Key

İL - XPL50 - TY - Q12

MOUNTING TYPE

PL : Panel Mount With M32 Lock Nut

BODY

50 : Q50

INPUT TYPE

T : Capacitive Touch

CONNECTION

Blank : 1 Meter Cable
Q12 : 5 Pin M12 Male Connector

SWITCH TYPE

Y : Momentary Action
K : Latch Action