



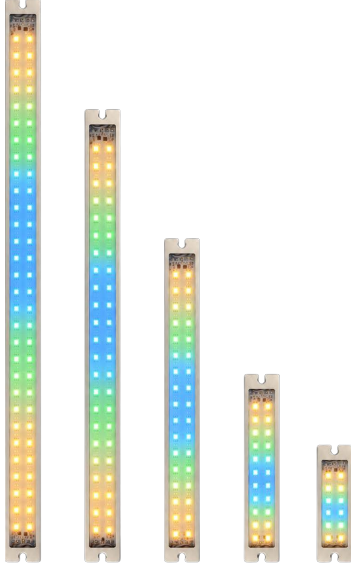

Technical Data - Electrical Ratings

Voltage Supply	18-30 VDC
Power Consumption	A = 125 mm: 3W A = 250 mm: 5W A = 480 mm: 9W A = 700 mm: 13W A = 910 mm: 17W
Connection	M12 5 pin connector - IO Link Flying cable
Dimensions	Check Drawing
Protection	IP67
Body Material	Aluminum
Window Material	PMMA
Mounting	Wall Mount
Temperature Range	-20°C to +50°C

Technical Drawings

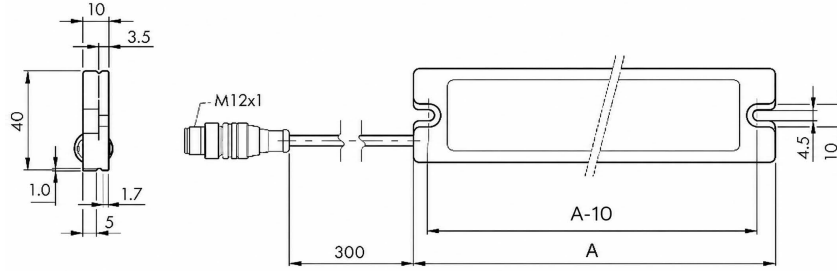

Connections

Preset operation modes					Length	
TRIG 1	TRIG 2	TRIG 3	Pre-Set		Var. 126	Var. 251-911
0	0	0	1	Off	Off	Off
1	0	0	2	Red	Red	Red
0	1	0	3	Green	Green	Green
1	1	0	4	Yellow	Yellow	Yellow
0	0	1	5	Blue	Blue	Blue
1	0	1	6	Red	Red	Red
0	1	1	7	Green	Green	Green
1	1	1	8	Red Cycling	Yellow	Yellow

Pre-sets can be defined via IO-Link.

Code Key

İL - XMLF - RGBW - 12 - IOL

ML SERIES MACHINE LIGHTING

DESIGN

F : Flat

LIGHT COLOR

RGB : RGB
WRGB : White + RGB

CONNECTION TYPE

IOL : M12 5 Pin Connector - IO Link Interface
A1 : Flying cable, 1 meter
Q12 : M12 5 pin connector

LENGTH

12 : 125mm
25 : 250mm
48 : 480mm
70 : 700mm
91 : 910mm